


TEXTURA SLATE

slate textured pavers



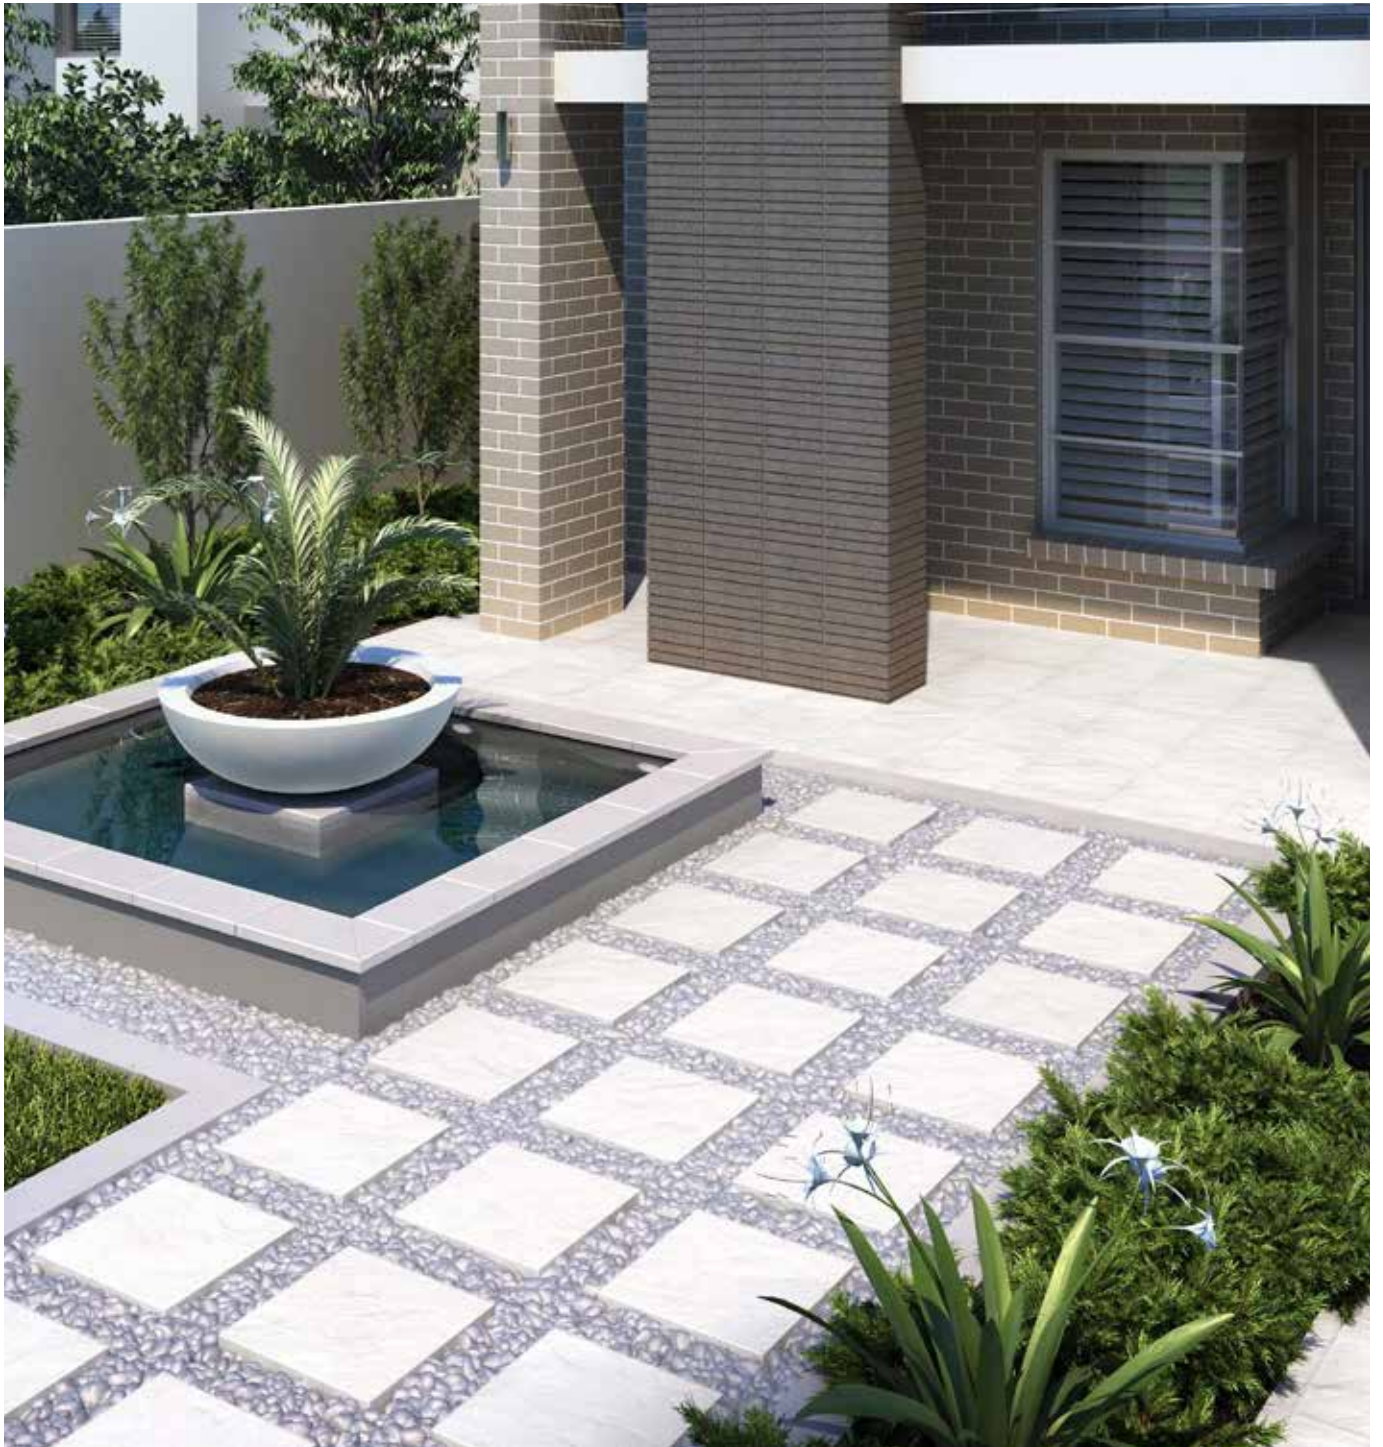

TEXTURA SLATE

defining style

The magnificent texture of Textura Slate pavers feature a realistic and appealing slate finish with a neutral colour palette. Perfect for ‘do it yourself’ projects, these pavers are strong, durable, and are virtually maintenance free.




Gun Metal



Steel



Ivory



Standard Unit
Size: 400L x 400W x 40H mm



Bullnose Unit
Size: 400L x 400W x 40H mm

Benefits

Designed to last

Concrete masonry products are designed to last the test of time.

Low maintenance

Minimal maintenance required to keep your pavers looking good.

Environmentally friendly

Low in embodied energy, recyclable and results in minimal waste.

Rust, rot and termite resistant

Concrete masonry products won't rust, rot or corrode and are termite resistant.

Strong and weather resistance

Strong and dense, concrete masonry is designed to withstand strong impact.

Design flexibility

Pavers can be used in a variety of design configurations to suit your style.

Technical Information

Colour	Work Size Dimensions (L x W x H mm)	Dimensional Category	Average Weight (kg)	Number/Tonne	Untis/m2	Pack Size
Ivory	400x400x40	DPA2	13.5	70	6.25	36
Gun Metal	400x400x40	DPA2	13.5	70	6.25	36

Highly Recommended

For maximum protection and longevity, Austral masonry recommends cleaning and sealing all pavers.

Sealers offer the following benefits:

- Sealers reduce staining and make cleaning easier
- Sealers can also deepen and enrich natural colours
- Sealers reduce penetration of water and reduce salt growth

LAYING INFORMATION

Austral Masonry recommends using a licensed trades person. For DIY installations please refer to the following basic guide:

Step 1 - Prepare

Excavate the area to be paved including; a base layer of 100-150mm thick for a road base, bedding sand of 30mm thickness and 40mm paver thickness.

Step 2 – Road base

Spread out the road base, and compact with a mechanical compactor to the desired thickness level. Use a spirit level to create a level finish.

Step 3 – Bedding sand

Spread and screed the bedding sand and establish bedding tracks with the screeding board.

Step 4 – Level the surface

Bed into the sand screed rail/s. Using the screeding board, drag over the embedded rails using a sawing motion (side to side) to firm and flatten the surface of the sand.

Step 5 – Setting Lines

Set up string lines at right angles for pavers. This will keep joints straight.

Step 6 – Start Laying

Lay whole pavers and start at the straight edge on longest section of the area to be paved. Leave a 3-5mm gap between each paver to allow for jointing sand.

Step 7 – Cut Pavers

If the job requires pavers to be cut to fit around objects or tie-in, measure the area to be cut from the paver and mark with permanent marker. Check the measurement, then use a brick saw with a masonry blade to cut desired measurement. Wash off paver and bed as per step 6.

Step 8 – Fill in the joints

Ensure all pavers are dry. Using a broom, sweep jointing sand over pavers into all joints ensuring a full and level filling.

Compact the surface, using either a rubber mallet or soft protected mechanical compactor. Then add more jointing sand if needed and sweep off excess.

Characteristic Breaking Load (kN)	Mean Cold Water Absorption (%)	Characteristic Abrasion Resistance (cm3)	Slip Resistance Category/Class AS4586	Durability (AS4456.10)	Density AS4456.8
5	2.5	7	P5	General Purpose	2296
5	2.5	7	P5	General Purpose	2350

What type of sealer to use

Austral Masonry recommends using a penetrative sealer. Textura pavers require sealing with a penetrative sealer when used around pools, water features or areas exposure to saline conditions. Different types of sealers can be purchased from local landscape suppliers and these come with detailed instructions on application and maintenance. When using sealers always refer to and follow the directions supplied. **Please note:** *Austral Masonry strongly advises you always conduct a patch test of the sealer on one paver to determine the visual effect it will achieve before full application.*



australmasonry.com.au | 1300 masonry (1300 627 667)



DESIGN CENTRES

Ormeau
184 Burnside Rd
Yatala QLD 4208

Rochedale
105 Gardner Rd
Rochedale QLD 4122

Caloundra
14 Daniel St
Caloundra QLD 4551

Gympie
Cnr Woondum Rd
and Bruce Highway
Gympie QLD 4570

DESIGN STUDIO

Brisbane
27 James St, Fortitude
Valley QLD 4006



A member of



Proud supporters



The product images shown in this brochure give a general indication of product colour for your preliminary selection. Austral Masonry recommends all customers see actual product samples at a selection centre prior to making final selections.

- 1. Stock colours.** Colours other than stock colours are made to order. Contact your nearest Austral Masonry office for your area's stock colours. A surcharge applies to orders less than the set minimum quantity.
- 2. Colour and texture variation.** The supply of raw materials can vary over time. In addition, variation can occur between product types and production batches.
- 3.** We reserve the right to change the details in this publication without notice.
- 4.** For a full set of Terms & Conditions of Sale please contact your nearest Austral Masonry sales office.